

CTI-400D

Digital INDICATOR


www.curiotec.com



⊙ FEATURES

- High resolution / Speed
- Multi-step Calibration (5 Step)
- For Digital load cell
- Digital Program for setting & calibration

⊙ DIMENSIONS

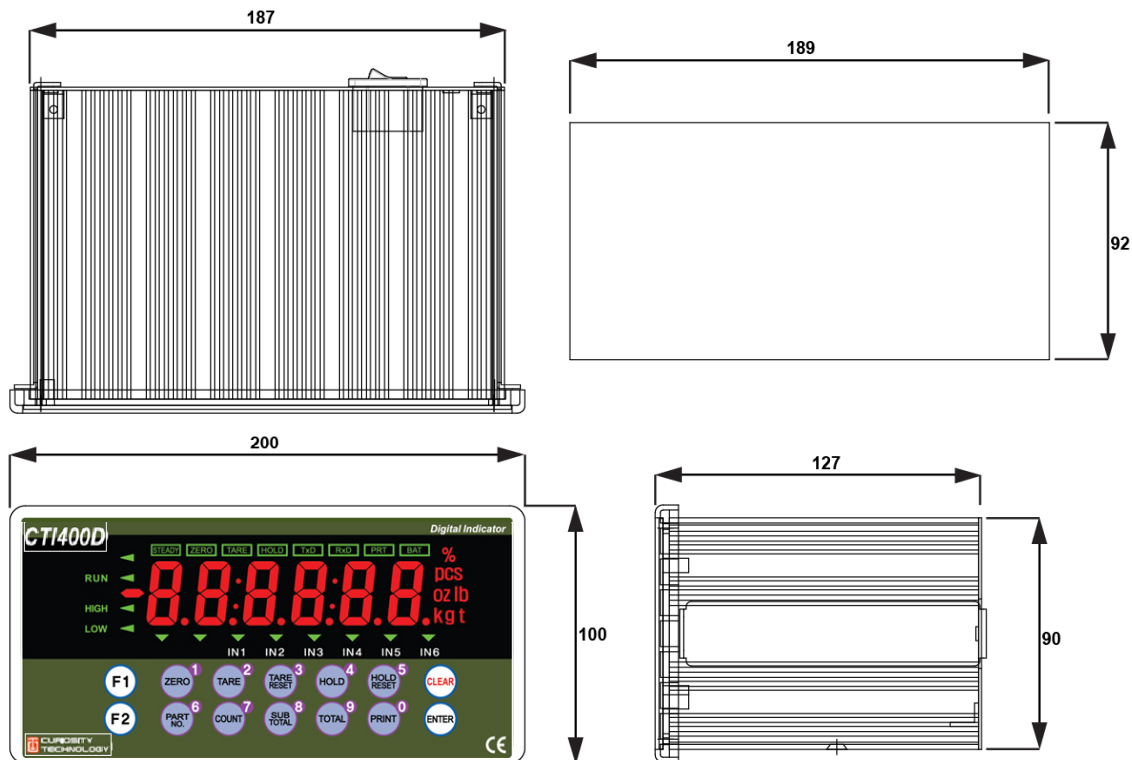

⊙ SPECIFICATIONS

Rated Capacity		
Digital load cell Interface	Excitation Voltage Load cell connection Communication mode Communication speed	DC 12V Max. 8 ea RS-485 2,400 bps ~ 115,200 bps
Operation Condition	Temperature Range Humidity Range	-10 °C ~ +40 °C [14 °F ~ 104 °F] 40% ~ 85% RH, Non-condensing
Function	Calibration mode	Dead Weight Calibraton
	Display	6 Digit, 25.4mm(1inch) RED FND 7 ea weight unit, RED LED 8 ea state display, GREEN LED 12 Point GREEN LED
	key	14 ea
Communication	External Input	6 ea
Power	Serial port1 (RS-232C)	DATA Transmit , Serial Printer , MODBUS(RTU)
Product	Size	AC220V
	Weight	200mm(W) × 100mm(H) × 126.5mm(D) Approx. 1.2 kg